


# HF Series Reed Relays

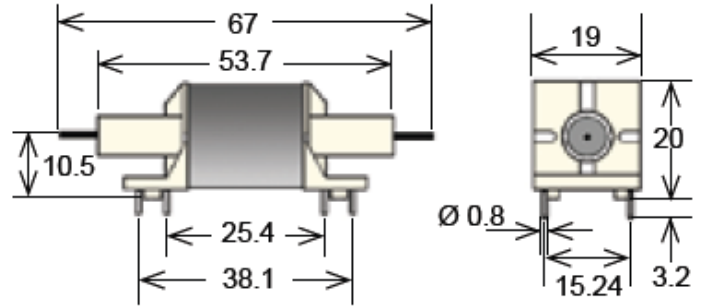

- Features: High RF/Power Relay, Patented External Electrostatic & Magnetic Shields
- Applications: Telecommunication, HF Tuned Antennas & Others
- Markets: Aerospace, Marine & Others

Part Description: **HF 00-0X-00-0**

Nominal Voltage	Contact QTY	Contact Form	Switch Model	Pin Out
05, 12, 24	1, 2	A, B	54	5, 6, 8, 9

Customer Options	Switch Model	Unit
<b>Contact Data</b>	<b>54</b>	
<b>Rated Power (max.)</b> Any DC combination of V&A not to exceed their individual max.'s	25	W
<b>Switching Voltage (max.)</b> DC or peak AC	500	V
<b>Switching Current (max.)</b> DC or peak AC	1.5	A
<b>Carry Current (max.)</b> DC or peak AC	5.0	A
<b>Contact Resistance (max.)</b> @ 0.5V & 50mA	150	mOhm
<b>Breakdown Voltage (min.)</b> According to EN60255-5	10	kVDC
<b>Operating Time (max.)</b> Incl. Bounce; Measured with w/ Nominal Voltage	3.0	ms
<b>Release Time (max.)</b> Measured with no Coil Excitation	1.5	ms
<b>Insulation Resistance (typ.)</b> Rh<45%, 100V Test Voltage	10 <sup>10</sup>	Ohm
<b>Capacitance (typ.)</b> @ 10kHz across open Switch	2.5	pF

Coil Data		Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
Contact Form	Switch Model					
Unit		VDC	Ohm	VDC	VDC	mW
1A	54	05	40	3.5	0.75	625
		12	250	8.4	1.8	575
		24	1,000	16.8	3.6	575
1B*		05	30	3.5	0.75	835
		12	170	8.4	1.8	850
		24	680	16.8	3.6	850

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

\* Re-closure of Form B may occur if the max. coil voltage is exceeded. Coil polarity on Form B must be observed. Pin 2 is positive.

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 85	°C
Storage Temperature	-40 to 105	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

### HF Reed Relay




### Handling & Assembly Instructions

- Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields need to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
- Wave soldering: maximum 260°/5 seconds.
- Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.

### Life Test Data

\*Load increase reduces life expectancy of Reed Switches

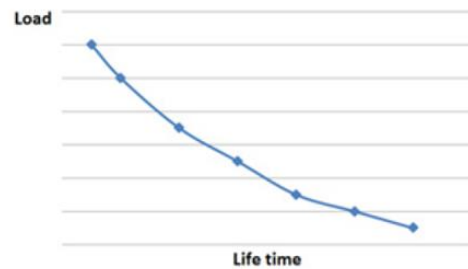


### Glossary Contact Form

Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	



**Pin Out**

View from top of component  
2.54mm [0.10"] pitch grid

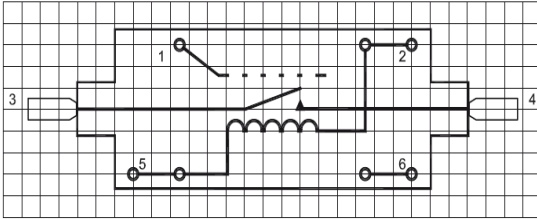

Pin # 5 must be positive for Form B version